

**INVESTIGATION OF BASALT REINFORCEMENT CROSSBARS**

Umarov Shodiljon Abdug'ofurovich
Fergana Polytechnic Institute, PhD
sh.umarov@ferpi.uz, (ORCID 0000-0003-2265-3232)

Abstract

In recent years, the President of the Republic of Uzbekistan and the Cabinet of Ministers have been making important decisions to raise the standard of living of the population and improve living conditions. In the implementation of these decisions, it is necessary to create economically inexpensive construction structures with high durability, uniqueness, and their practical application in the construction of production enterprises, residential buildings, and engineering structures, which are necessary for the economy.

Keywords: composite, basalt, concrete, flexibility, strength, messura, polymer.

Introduction

In recent years, the President of the Republic of Uzbekistan and the Cabinet of Ministers have been making important decisions to raise the standard of living of the population and improve living conditions. In the implementation of these decisions, it is necessary to create economically inexpensive construction structures with high durability, uniqueness, and their practical application in the construction of production enterprises, residential buildings, and engineering structures, which are necessary for the economy. The issues raised in this direction include the use of composite materials, which are relevant today. The use of composite materials in construction increases the overall reliability and technical economic efficiency of industrial, residential, public buildings and engineering structures in accepting permanent, temporary and earthquake stresses.

The use of flexible elements reinforced with composite reinforcements in industrial, residential, public buildings and engineering structures requires a scientific basis based on a new theory, confirmed by the results of experimental research. Appropriate recommendations and practical solutions should be developed based on scientific research[1-5].

Year by year, the volume of construction and improvement works is increasing in the Republic of Uzbekistan. In order to successfully implement the planned large-scale construction works, extensive use of new innovative technologies is required. The introduction of polymer composite reinforcements into the construction practice in the conditions of Uzbekistan requires their research in the conditions of our country. Therefore, conducting research in the direction of reinforcement of concrete structures with polymer composite reinforcements is an urgent problem of social and economic importance.



Therefore, it is appropriate to conduct complex experimental-theoretical studies to determine the state of stress-deformation of flexural concrete structures equipped with basalt-plastic composite reinforcements, the formation and development of cracks in them, uniformity, failure patterns and strength. . For this, it is necessary to experimentally study the resistance of bending moments and transverse forces of flexible elements reinforced with basalt plastic rods made of ordinary heavy concrete.

Materials, constructions and test models:

Test models-sample beams with a rectangular cross-section were prepared for conducting experimental studies. Ordinary heavy concrete was used for the beams. Portland cement of the Turon cement plant in Beshariq district of Fergana region with an activity of 42.5 MPa was used as a binder for concrete. As fillers, quartz river sand from Akbarabad quarry, Kuva district, Fergana region, with a fraction of 5-15 mm and a bulk modulus of M2.25 was used. The composition of the concrete was chosen so that its cubic strength would have a compressive strength corresponding to the class B20 and B35. Granite limestone was sieved, washed in a special device and then dried (Table 1)[6-9].

Granulation composition of ordinary heavy concrete aggregates Table 1.

Filler type	Residue in % by weight on a sieve with a hole size of mm								
	20	15	10	5	1,25	0,63	0,315	0,14	0,07
Granite limestone	2-4	4-6	90-95	92-100	-	-	-	-	-
Quartz sand	-	-	-	-	1-2	4-5	12-15	45-50	90-100

The consumption of materials for 1 m³ concrete mixture of class B30 is given in table 2.

Concrete composition for sample beams Table 2.

№	Naming	Amount	Unit of measure
1	Portland cement M400 of "Turon" cement factory, Beshariq district, Fergana region	380	kg
2	pebble	1170	kg
3	Quartz sand	670	kg
4	Water	165	litr
5	Density of concrete:	2385	kg/m ³
6	Concrete water/cement ratio (S/S)	0,43	

The consumption of materials for 1 m³ concrete mixture of class B20 is given in table 3.

Concrete composition for sample beams Table 3.

№	Naming	Amount	Unit of measure
1	Portland cement M400 of "Turon" cement factory, Beshariq district, Fergana region	300	kg
2	pebble	1220	kg
3	Quartz sand	720	kg
4	Water	150	litr
5	Density of concrete:	2390	kg/m ³
6	Concrete water/cement ratio (S/S)	0,50	



The materials were dosed with an accuracy of ± 0.1 kg by weight. An electronic scale with high accuracy was used for this purpose. The results of the cube tests are presented in Table 4.

Test results of cubes made of sample beam concrete Table 4.

№	Beam cipher	Age of concrete (days)	Edge of sample cubes, cm	Compressive strength of concrete, MPa	Strength of concrete		
					R _b , MPa	R _{bt} , MPa	E _b *10 ⁻³ MPa
1	2	3	4	5	6	7	8
1	BKPA -1	30	10	26,35	14,3	1,33	30,1
2	BKPA -2	30	10	25,42	13,9	1,30	29,6
3	BKPA -3	30	10	25,63	14,0	1,30	29,7
4	BKPA -4	30	10	26,34	14,3	1,33	30,1
5	BKPA -5	30	10	35,84	19,3	1,63	34,2
6	BKPA -6	30	10	35,45	19,1	1,62	33,8

Together with the beam samples, cubes with dimensions of 10x10x10 cm were prepared from the same mixture. After 28 days of storage under conditions of normal temperature $t=20\pm 20^{\circ}\text{C}$ and relative humidity $\varphi=60-65\%$, the sample cubes were tested in a hydraulic press until failure under compressive force.

After determining the cubic strength of concrete, the prismatic strength corresponding to it was calculated according to the expression $R_b=0.75R$, and its tensile strength was calculated according to the formula $R_{bt}=0.5\sqrt[3]{(R^2)}$.

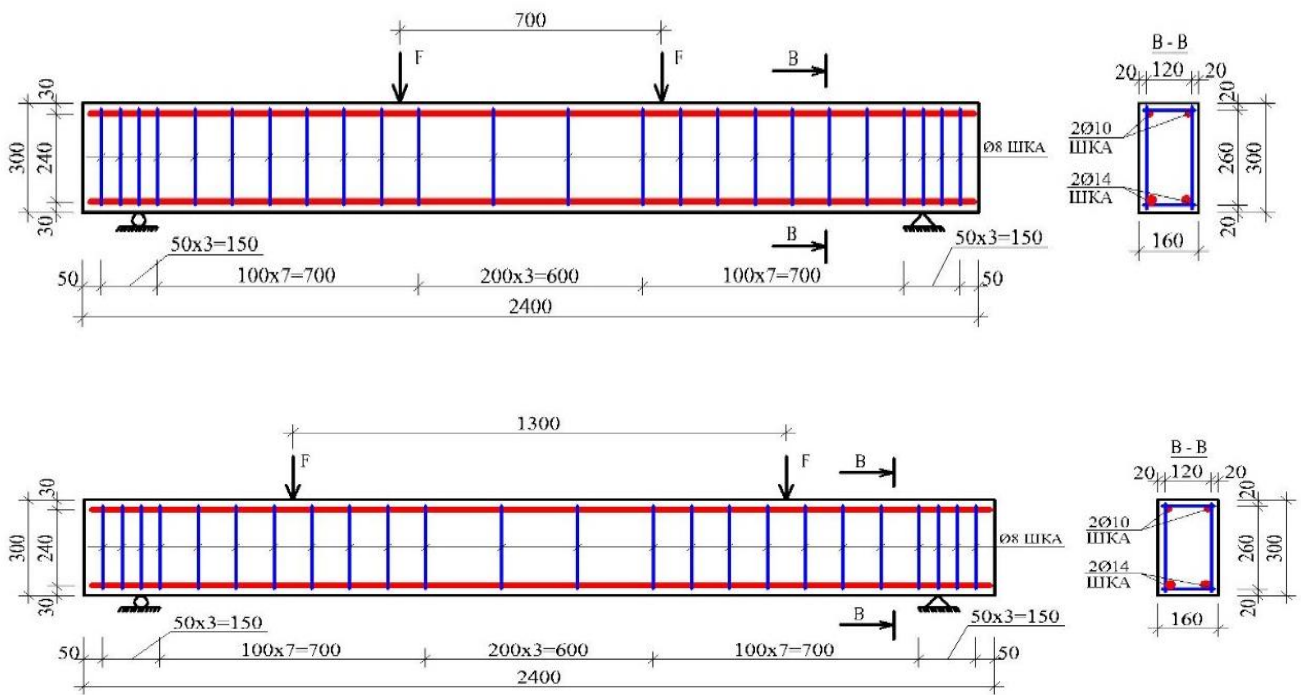


Figure 1. Schemes of reinforcement and loading of sample beams.

For experimental studies, 4 B20, 2 B30 beams with cross-sectional dimensions of 16x30 cm and length of 240 cm equipped with concrete and composite reinforcements were prepared. The beams were made in wooden molds. The inner surface of the molds was covered with metal sheets. In 2 test samples made of B20 class concrete, 2Ø14BKA reinforcements were



placed in the tensile area, 2Ø12BKA in the compressive area, and Ø8BKA reinforcements were placed in 7.5 cm increments as working reinforcements (Fig. 2.2). In 2 test samples made of B20 class concrete, 2Ø14BKA was placed in the tensile area as working reinforcement, 2Ø12BKA in the compressive area, and Ø6A-I reinforcements were placed in steps of 7.5 cm as clamps (Fig. 2.3). In 2 test samples made of B30 class concrete, 2Ø14BKA was placed in the tensile area as working reinforcement, 2Ø12BKA in the compressive area, and Ø6A-I reinforcements were placed in steps of 7.5 cm as clamps (Fig. 2.3). The composite reinforcements for the tie rods were welded to the longitudinal reinforcements with mild steel wires. Reinforcement wedges were installed and fixed in the formwork at the project site. Beam samples were made from heavy concrete of B20 and B30 class. Together with the sample beams, cubes of 6 and 9 pieces with a size of 10x10x10 cm were made from the same concrete at the same time.[10-15].

The sample beams were tested in bending on a force stand. The stand is specially designed to load the beams through two cumulative forces and test the midsection in pure bending. The beams were mounted on 2 hinged supports of the stand for testing samples. One of the hinges is fixed and the other is movable. The distance between the forces was 700 mm, and the distance from the supports to the load was 420 mm. The distance from the base to the edge of the beams is 100 mm. The load was delivered using a 24-ton manually operated hydraulic jack. For this, dividing traverses were used.

After the tests, the location of the cracks was determined, the samples were photographed and the height of the cracks was measured, the distances between them were determined, the protective layers of the working fittings were determined and the working height was measured.

During the test, the deformations of concrete and reinforcements, the time of formation of normal and oblique cracks and the amount of load, the stiffness of the beam were measured and recorded.

The dimensions of the sample beams prepared for the experiment, the interval of application of the loads acting on the sample beams, the classes of concrete used and the number, diameter of longitudinal tensile and compressive reinforcements, transverse reinforcements (clamp) number and diameters are given in table 5.

Main characteristics of sample beams. Table 5.

Sample №	Sample password	Dimensions, sm			Reinforcement			Load range, sm	Design class of concrete
		<i>b</i>	<i>h</i>	<i>h₀</i>	Transverse reinforcement (clamps)	Longitudinal stretchy	Longitudinal compressible		
BKPA -1		16	30	28,0	2Ø 8 BKA	2Ø 14 BKA	2Ø 12 BKA	70	B20
BKPA -2		16	30	28,0	2Ø 8 BKA	2Ø 14 BKA	2Ø 12 BKA	70	B20
BKPA -3		16	30	28,0	Ø 6 A-I	2Ø 14 BKA	2Ø 12 BKA	70	B20
BKPA -4		16	30	28,0	Ø 6 A-I	2Ø 14 BKA	2Ø 12 BKA	70	B20
BKPA -5		16	30	28,0	Ø 6 A-I	2Ø 14 BKA	2Ø 12 BKA	70	B30
BKPA -6		16	30	28,0	Ø 6 A-I	2Ø 14 BKA	2Ø 12 BKA	70	B30



During the experiment, the failure of BKPA-1,2 samples occurred at values close to the calculated loads, the load of BKPA-3,4,5,6 samples was almost 2 times higher than the calculated loads. In sample beams 1, 2, it was noted that the experimental load differs from the calculated load by 10-20% on average. In sample beams 3, 4, 5, 6, it was noted that the experimental load differs from the calculated load by 85-95% on average.

In most of the damaged samples on the slope sections, the value of the given force (0.9-0.95) after reaching the M_{ult} values, the nodes of the connecting rods with the longitudinal reinforcements were broken and the compression areas of the beam were sheared. observed. It was observed that the concrete lost its strength after the strength value reached (0.9-0.95) M_{ult} values in most of the samples with failure in the compressive part.

It was observed that the amount of bending moments M_{crc} during the formation of cracks in the sample beams depends on the value of the distance "a" (shear interval) between the load and the support.

The values of the experimental M_{crc}^t and calculated M_{crc}^x bending moments normal to the element's longitudinal axis in the sample beams are presented in Table 6.

Formation of normal cracks in sample beams Table 6.

Sample beam cipher	The distance between the forces, sm	Bending moment in the formation of normal cracks, kNm		M_{ult}^t	$\frac{M_{crc}^t}{M_{ult}^t}$	$\frac{M_{crc}^t}{M_{crc}^x}$
		Experimental M_{crc}^t	Accounting M_{crc}^x			
BKPA-1	42	3,15	2,18	14,6	0,215	1,445
BKPA -2	42	3,15	2,17	13,7	0,21	1,451
BKPA -3	42	3,15	2,16	22,7	0,229	1,458
BKPA -4	42	3,15	2,18	23,8	0,132	1,445
BKPA -5	42	4,73	2,34	26	0,175	2,022
BKPA -6	42	4,73	2,36	26,9	0,176	2,004

The opening width of normal cracks was $a_{crc}=0.2-0.35$ mm at loads equal to half of the destructive load, the further increase of loads caused intensive development of normal cracks and a significant increase in opening width. When the ratio of step load to breaking load reached 0.6-0.85, the opening width of normal cracks was 0.4-0.7mm. The subsequent increase in loads resulted in violent opening of normal cracks.

It was found that the results of calculation of the opening width of cracks normal to the longitudinal axis of the element according to the method presented in ShNQ satisfactorily agree with the laws and quantities of changes obtained in the experiments.

Based on theoretical calculations, the values of M_{crc}^x are from 4.44 kN·m to 5.37 kN·m. The average value of M_{crc}^x was equal to 4.9 kN·m. The difference between the average value of M_{crc}^x and the smallest and largest values is 0.93 kN·m (5.2%) and 0.38 kN·m (3%), respectively. In other words, almost stable values for M_{crc}^x were obtained in the calculations.

The ratio of the experimental M_{crc}^t to the calculated (theoretical) M_{crc}^x was greater than 1 and averaged 1.23 in BKPA-1,2 sample beams, in BKPA-3,4,5,6 sample beams and



the average was 1.85. It was found that the average value of the experimental crack-forming moments in BKPA-1,2 samples is equal to 22% of the breaking moments. In BKPA-3,4,5,6 samples, the average value of the experimental crack-forming moments was found to be 9-11% of the breaking moments.

In the process of testing the sample beams under load, cracks directed obliquely to the longitudinal axis of the element were formed a little later than normal cracks. After the formation of normal cracks, the formation of oblique cracks was observed in the sample beams only after increasing the load in at least 1-2 stages.

In the experiments, it was found that the formation, development and opening width of oblique cracks depends on the amount of reinforcement of the sample beams with collars, the diameter and pitch of the collars, the shear interval a/h_0 , the amount and diameter of the longitudinal working reinforcement, and the strength of the concrete.

In theoretical calculations, the transverse force forming oblique cracks was determined according to the following formula:

$$Q_{crc}^h = 0,6 R_{bt,ser} b h_0 \quad (1)$$

For cases with a shear interval $a > 1.5x_0$, as a result of entering the ratio h_0/a instead of the coefficient 0.6 in the above formula, it was observed that the ratios of the experimental and theoretical oblique crack-forming forces are significantly improved. In this case, the formula for finding transverse forces in the formation of oblique cracks is expressed as follows:

$$Q_{crc}^h = \frac{R_{bt,ser} b h_0^2}{a} \quad (2)$$

but, $0.6R_{(bt,ser)}$ should not exceed bh_0 .

Formation of oblique cracks in sample beams

Table 7.

Sample beam cipher	Shear span (distance from support to force), sm	Transverse force in the formation of oblique cracks, kN		$\frac{Q_{crc}^t}{Q_{crc}^x}$	Q_{ult}^t , kN	$\frac{Q_{crc}^t}{Q_{ult}^t}$
		Experimental Q_{crc}^t	Accounting Q_{crc}^x			
BKPA -1	42	14,2	12,75	1,11	35	0,41
BKPA -2	42	14,8	12,35	1,19	34	0,44
BKPA -3	42	14,5	12,45	1,16	54	0,27
BKPA -4	42	14,9	12,65	1,18	57	0,26
BKPA -5	42	18,2	15,45	1,18	62	0,29
BKPA -6	42	18,9	15,35	1,23	64	0,30

In BKPA-1.2 sample beams ($a=42\text{cm}$), the initial oblique cracks were formed at loads $Q_{crc}^h=14.2-14.8$ kN, where the ratio $(Q_{crc}^t)/(Q_{ult}^t)$ was 0, It was 8. In BKPA-3.4 sample beams ($a=42\text{cm}$), the initial oblique cracks were formed at loads $Q_{crc}^h=14.5-14.9$ kN, where the ratio $(Q_{crc}^t)/(Q_{ult}^t)$ was 1, It was 25. In BKPA-5.6 sample beams ($a=42\text{cm}$), the initial oblique cracks were formed at loads $Q_{crc}^h=18.2-18.9$ kN, where the ratio $(Q_{crc}^t)/(Q_{ult}^t)$ was 1, It was 37.



As the load increased, intensive opening of oblique cracks occurred. Especially at the load level of $0.8Q_{ult}$ and more, oblique cracks developed rapidly, their opening width was 1.0mm and more. In this way, the oblique cracks became critical cracks and the failure of the beams occurred.

At loads (0.5-0.7) K_{ult} , the opening width of oblique cracks in the beams was in the range of 0.2-0.5 mm[16-18].

Conclusions:

Normal cracks in BKPA-1.2 sample beams $a=42$ cm ($a/h=1.95$) at bending moments equal to 6.8-7kN, normal cracks in BKPA-3.4 sample beams 7.6-7 At bending moments equal to .9 kN, normal cracks were formed in BKPA-5.6 sample beams at bending moments equal to 11-11.2 kN. In this case, the ratio of the crack forming moment to the breaking moment was $(M_{cr}^t)/(M_{ult}^t)=0.220$.

The ratio of the experimental value of the cracking moments to the calculated value of the BKPA-1,2,3,4 sample beams, the ratio of the experimental and calculated cracking moments is 1.445 and 1.458, the experimental and calculated cracking moments of the BKPA-5,6 sample beams the ratio was 2.022 and 2.004.

References

1. Aboubakirova Z. A., Bobofozilov O. The use of binder slags in salt-resistant concrete structures //International conferences on training. – 2022. – T. 1. – №. 6..
2. Asrorovna A. Z. Effects of a Dry Hot Climate and Salt Aggression on the Permeability of Concrete //the American Journal of Engineering and Technology. – 2021. - T. 3. – №. 06. - S. 6-10.
3. Abobakirova Z. A. Regulation of the Resistance of Cement Concrete with Polymer Additive and Activated Liquid Medium //the American Journal of Applied sciences. – 2021. - T. 3. – №. 04. - S. 172-177.
4. Akhrarovich A. X., Mamajonović M. Y., Abdugofurovich U. S. Development of Deformations in the Reinforcement of Beams with Composite Reinforcement //the American Journal of Applied sciences. – 2021. - T. 3. – №. 5. - S. 196-202.
5. Goncharova N. I., Abobakirova Z. A., Kimsanov Z. Technical Features of Magnetic Activation of Cement Paste" Advanced Research in Science //Engineering and Technology. – 2019. - T. 6. – №. 5.
6. Kirsanov Z. O., Goncharova N. I., Abubakirova Z. A. Study of technological factors of magnetic activation of cement dough //A young scientist. – 2019. – №. 23. – pp. 105-106.
7. Goncharova N. I., Abobakirova Z. A. RECEPTION MIXED KNITTING with MICROADDITIVE and GELPOLIMER THE ADDITIVE //Scientific-technical journal. – 2021. - T. 4. – №. 2. - S. 87-91
8. Goncharova N. I., Abobakirova Z. A., Mukhamedzanov A. R. Capillary permeability of concrete in salt media in dry hot climate //AIP Conference Proceedings. - AIP Publishing LLC, 2020. - T. 2281. – №. 1. - S. 020028.



9. Shavkatovich, N. K. (2022). SYSTEMS OF ARTIFICIAL REGULATION OF THE AIR ENVIRONMENT OF APARTMENTS AND HOUSES. *Spectrum Journal of Innovation, Reforms and Development*, 9, 169-174.
10. Набиев, М. Н., Насриддинов, Х. Ш., & Кодиров, Г. М. (2021). Влияние Водорастворимых Солей На Эксплуатационные Свойства Наружные Стен. *Ta'lim va rivojlanish tahlili onlayn ilmiy jurnali*, 1(6), 44-47.
11. Ibayevich, M. Q. (2023). Design of Foundations in Extremely Solid Soils. *Texas Journal of Agriculture and Biological Sciences*, 16, 11-15.
12. Ibayevich, M. K. (2023). В ГОРИЗОНТАЛЬНО ЗАГРУЖЕННЫЕ СВАИ В ЗАСОЛЕННЫХ ГРУНТАХ. *Finland International Scientific Journal of Education, Social Science & Humanities*, 11(3), 1085-1092.
13. Ibayevich, M. Q. (2022). Свайные Фундаменты Сельскохозяйственных Зданий На Засоленных Грунтах. *Central Asian Journal of Theoretical and Applied Science*, 3(10), 290-295.
14. Numanovich, A. I., & Ravshanbek o'g'li, R. R. (2022). BASALT FIBER CONCRETE PROPERTIES AND APPLICATIONS. *Spectrum Journal of Innovation, Reforms and Development*, 9, 188-195.
15. Ashurov, M., & Ravshanbek o'g'li, R. R. (2023). RESEARCH OF PHYSICAL AND MECHANICAL PROPERTIES OF BASALT FIBER CONCRETE. *European Journal of Interdisciplinary Research and Development*, 17, 12-18.
16. Ravshanbek o'g'li, R. R. (2023). BAZALT FIBRALARI ORQALI BETON TARKIBNI OPTIMALLASHTIRISH. SO 'NGI ILMIY TADQIQOTLAR NAZARIYASI, 6(7), 37-44.
17. Davlyatov, S. M., & Kimsanov, B. I. U. (2021). Prospects For Application Of Non-Metal Composite Valves As Working Without Stress In Compressed Elements. *The American Journal of Interdisciplinary Innovations Research*, 3(09), 16-23.
18. Mahammadyakubovich, Y. E. (2022). STABILITY OF STRUCTURES OF BUILDINGS AND STRUCTURES FROM PARASEISMIC EFFECTS (DETONATION WAVES). *Spectrum Journal of Innovation, Reforms and Development*, 9, 256-262.
19. Mirzababayeva, S., Abobakirova, Z., & Umarov, S. (2023). Crack resistance of bent concrete structures with fiberglass reinforcement. In *E3S Web of Conferences* (Vol. 452, p. 06023). EDP Sciences.
20. Abobakirova, Z., Umarov, S., & Raximov, R. (2023). Enclosing structures of a porous structure with polymeric reagents. In *E3S Web of Conferences* (Vol. 452, p. 06027). EDP Sciences.
21. Goncharova, N., Abobakirova, Z., Davlyatov, S., Umarov, S., & Mirzababayeva, S. (2023). Capillary permeability of concrete in aggressive dry hot climate. In *E3S Web of Conferences* (Vol. 452, p. 06021). EDP Sciences.
22. Goncharova, N., Abobakirova, Z., Davlyatov, S., Umarov, S., & Mukhamedzanov, A. (2023). Polymer reagent in construction practice. In *E3S Web of Conferences* (Vol. 365, p. 02024). EDP Sciences.



23. Akramov, X., Davlyatov, S., Umarov, S., & Abobakirova, Z. (2023). Method of experimental research of concrete beams with fiberglass reinforcement for bending. In E3S Web of Conferences (Vol. 365, p. 02021). EDP Sciences.
24. Umarov, S. A. O. (2023). UCH QAVATLI BINONI SEYSMIK KUCHLAR TA'SIRIGA LIRA 9.6 DASTUR YORDAMIDA HISOBLASH. GOLDEN BRAIN, 1(1), 224-230.
25. Умаров, Ш. А. (2022). ЎЗБЕКИСТОН ШАРОИТИДА ШИШАТОЛАЛИ АРМАТУРАЛАРНИ БЕТОН ТЎСИНЛАРДА ҚЎЛЛАШИ. Journal of Integrated Education and Research, 1(5), 396-404.
26. Abdugofurovich, U. S., & Mirzaakbarovna, M. S. (2022). COMBINED COMPOSITE REINFORCED CONCRETE BEAMS. Spectrum Journal of Innovation, Reforms and Development, 8, 317-324.
27. Asrorovna, A. Z., Abdugofurovich, U. S., & Mirzaakbarovna, M. S. (2022). OPTIMIZATION OF CORROSION-RESISTANT CONCRETE WITH CHEMICAL ADDITIVES. Spectrum Journal of Innovation, Reforms and Development, 8, 296-303.
28. Asrorovna, A. Z., Abdug'ofurovich, U. S., & Sodiqjon o'g'li, S. F. (2022). ISSUES OF IMPROVING THE ECONOMY OF BUILDING MATERIAL-WOOD PRODUCTION. Spectrum Journal of Innovation, Reforms and Development, 8, 336-340.